



Series	FS	Warranty	1 Year
Volts	8	Design	GC8
Cells	4	Plates/Cell	11
Terminal Type	UTL		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	20 A
Maximum Charge Current	30 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	469
Marine Crank Amps (MCA) 32°F / 0°C	586
Reserve Capacity (RC @ 25A)	280 Minutes
Reserve Capacity (RC @ 56A)	100 Minutes
Reserve Capacity (RC @ 75A)	69 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>198 AH</b>	<b>1.98 A</b>
@ 72 Hour Rate	<b>195 AH</b>	<b>2.71 A</b>
@ 50 Hour Rate	<b>184 AH</b>	<b>3.69 A</b>
@ 20 Hour Rate	<b>155 AH</b>	<b>7.75 A</b>
@ 15 Hour Rate	<b>147 AH</b>	<b>9.82 A</b>
@ 10 Hour Rate	<b>136 AH</b>	<b>13.64 A</b>
@ 8 Hour Rate	<b>133 AH</b>	<b>16.66 A</b>
@ 5 Hour Rate	<b>122 AH</b>	<b>24.49 A</b>
@ 1 Hour Rate	<b>62 AH</b>	<b>62 A</b>

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications


Certified System SAI GLOBAL ISO 9001 Quality	Weight	27 kg	59.5 lbs
	Length	259 mm	10.19"
	Width	181 mm	7.13"
	Height Incl. Term.	279 mm	11"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	57 mm	2.25"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Top Molded Strap Brackets	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps

### Cycle Life vs. Depth of Discharge

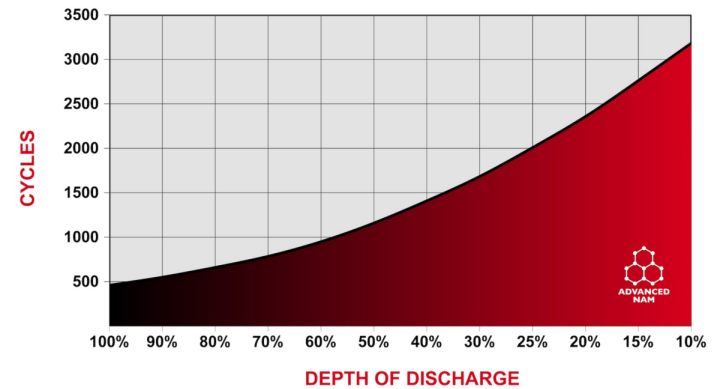

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

### Detailed Illustration

