



Series	AGM-R	Warranty	See Warranty Terms
Volts	12	BCI	
Terminal Type		F9(M8)	
Included Hardware		M8 stainless bolts & washers	
Size & Thread		M8	

Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	30 A
Maximum Charge Current	45 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	5 mΩ

Capacity

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 20 Hour Rate	159 AH	7.95 A
@ 10 Hour Rate	150 AH	15 A
@ 5 Hour Rate	128 AH	25.6 A

Cut Off Voltage	Constant Current Discharge						
	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
1.8 VPC	79.3	47.6	37.5	29.8	25.5	17.9	15


Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	43.5 kg	96 lbs
	Length	56.5 cm	22.2"
	Width	11.0 cm	4.33"
	Height Inc. Term.	28.8 cm	11.3"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

Cycle Life vs. Depth of Discharge

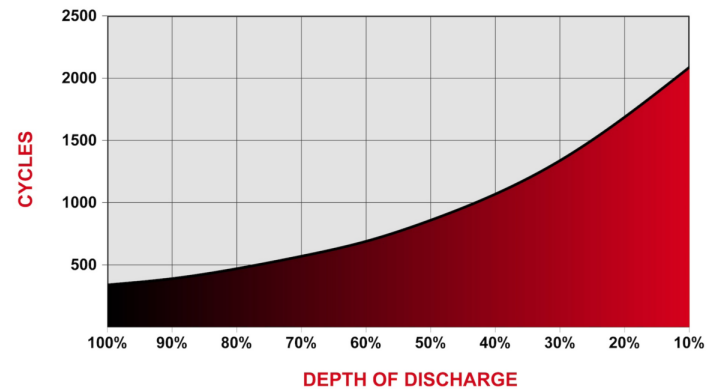

Detailed Illustration

