



Series	AGM-R	Warranty
Volts	12	BCI
Terminal Type	F14(M8)	
Included Hardware	M8 stainless bolts & washers	
Size & Thread	M8	

Charge

Recommended Charge Current	40 A
Maximum Charge Current	60 A
Internal Resistance	4 mΩ

Capacity

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 20 Hour Rate	212 AH	10.6 A
@ 10 Hour Rate	200 AH	20 A
@ 5 Hour Rate	170 AH	34 A

Cut Off Voltage	Constant Current Discharge						
	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
1.8 VPC	105.8	63.4	50	39.7	34	23.9	20


Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	57.5 kg	127 lbs
	Length	56.0 cm	22.1"
	Width	12.5 cm	4.92"
	Height Inc. Term.	31.6 cm	12.4"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Container (Inner)	Polypropylene
Cover (Inner)	Polypropylene - heat sealed to inner container
Container (Outer)	High Density Polyethylene
Cover (Outer)	High Density Polyethylene snap fit to outer container

Cycle Life vs. Depth of Discharge

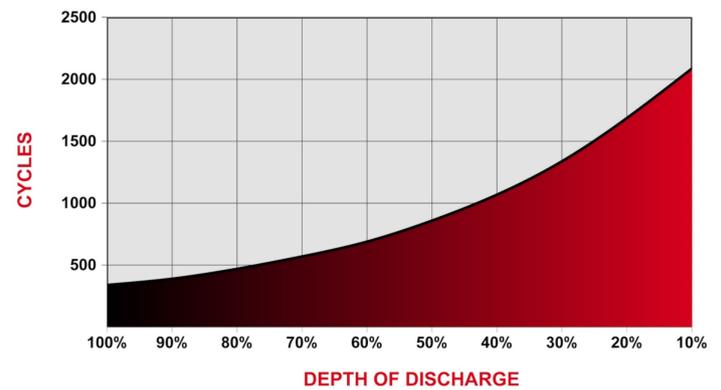

Detailed Illustration

