



Series	AGM-R	Warranty
Volts	12	BCI
Terminal Type	F14(M8)	
Included Hardware	M8 stainless bolts & washers	
Size & Thread	M8	

Charge

Recommended Charge Current	40 A
Maximum Charge Current	60 A
Internal Resistance	4 mΩ

Capacity

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 20 Hour Rate	212 AH	10.6 A
@ 10 Hour Rate	200 AH	20 A
@ 5 Hour Rate	170 AH	34 A

Cut Off Voltage	Constant Current Discharge							
	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr	
1.8 VPC	105.8	63.4	50	39.7	34	23.9	20	


Specifications

	Weight	57.5 kg	127 lbs
	Length	56.0 cm	22.1"
	Width	12.5 cm	4.92"
	Height Inc. Term.	31.6 cm	12.4"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Container (Inner)	Polypropylene
Cover (Inner)	Polypropylene - heat sealed to inner container
Container (Outer)	High Density Polyethylene
Cover (Outer)	High Density Polyethylene snap fit to outer container

Cycle Life vs. Depth of Discharge

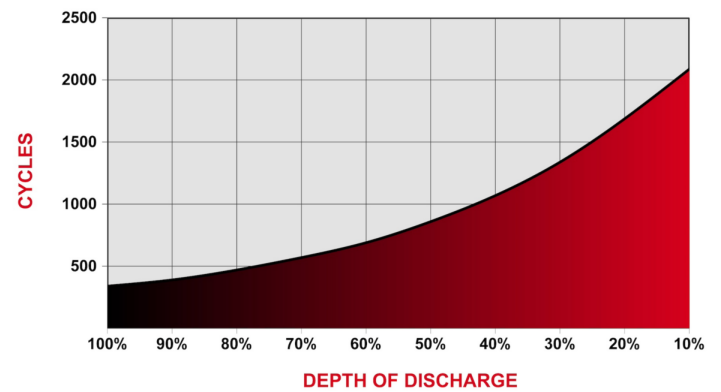

Detailed Illustration

