



Series		Warranty	See Warranty Terms
Volts	2	BCI	
Cells	1		
Terminal Type		F10(M8)	
Included Hardware		M8 stainless bolts & washers	
Size & Thread		M8	

Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current	225 A
Maximum Charge Current	300 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)
Internal Resistance	.4 mΩ

Capacity

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 20 Hour Rate	1785 AH	89.25 A
@ 10 Hour Rate	1500 AH	150 A
@ 5 Hour Rate	1275 AH	255 A

Cut Off Voltage	Constant Current Discharge						
	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
1.80 VPC	793.4	491.7	375	305.1	255	179.5	150


Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	80 kg	176.5 lbs
	Length	35.5 cm	14"
	Width	33.7 cm	13.3"
	Height Inc. Term.	34.2 cm	13.5"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	None

Capacity vs. Temperature

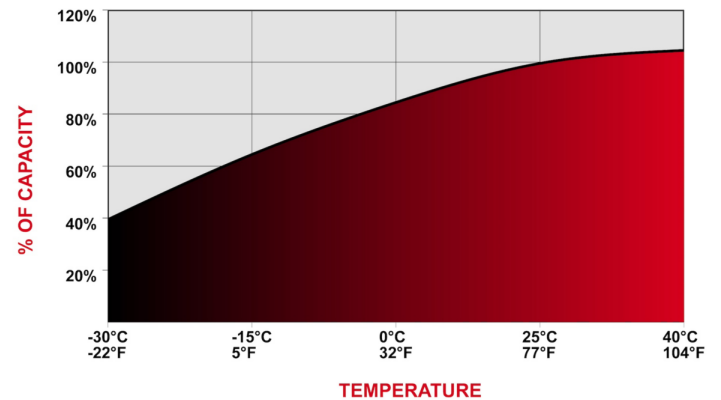

Detailed Illustration

