



Series	AGM-R	Warranty	See Warranty Terms
Volts	2	BCI	
Cells	1		
Terminal Type	F10(M8)		
Included Hardware	M8 stainless bolts & washers		
Size & Thread	M8		

### Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current	60 A
Maximum Charge Current	80 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)
Internal Resistance	.68 mΩ

### Capacity

Hour Rate	Capacity / AMP Hour	Current / AMPs					
@ 20 Hour Rate	476 AH	23.8 A					
@ 10 Hour Rate	400 AH	40 A					
@ 5 Hour Rate	340 AH	68 A					
Cut Off Voltage	Constant Current Discharge						
1.80 VPC	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
	211.6	131.1	100	81.3	68.0	47.9	40


### Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	19 kg	42 lbs
	Length	17 cm	6.69"
	Width	15 cm	5.91"
	Height Inc. Term.	34.2 cm	13.5"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	None

### Capacity vs. Temperature

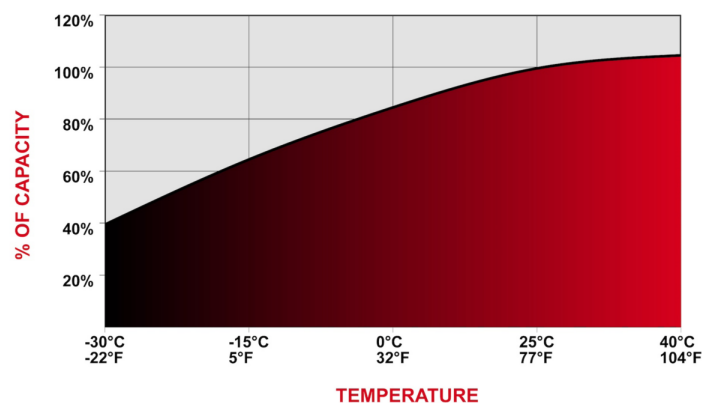

### Detailed Illustration

