



| | | | |
|-------------------|------------------------|----------|--------------------|
| Series | GEL | Warranty | See Warranty Terms |
| Volts | 2 | BCI | 2V OPzV |
| Cells | 1 | | |
| Terminal Type | F10 | | |
| Included Hardware | Threaded Insert & Bolt | | |

Charge

| | |
|----------------------------|---------------------------------------|
| Recommended Charge Current | 35 A |
| Maximum Charge Current | 105 A |
| Self-Discharge Rate | Less than 2% per month at 20°C (68°F) |
| Internal Resistance | 0.6 mΩ |

Capacity

| | | | | |
|--------------------------------|--------------|-------------|------------|-------------|
| Capacity Affect by Temperature | 40°C (104°F) | 25°C (77°F) | 0°C (32°F) | -15°C (5°F) |
| | 105% | 100% | 89% | 79% |

| Hour Rate | Capacity / AMP Hour | Current / AMPs |
|-----------------|---------------------|----------------|
| @ 100 Hour Rate | 556 AH | 5.56 A |
| @ 20 Hour Rate | 459 AH | 22.95 A |
| @ 10 Hour Rate | 405 AH | 40.5 A |

Specifications




| | | |
|-------------------|---------|--------|
| Weight | 30 kg | 66 lbs |
| Length | 12.4 cm | 4.88" |
| Width | 20.6 cm | 8.11" |
| Height Inc. Term. | 49.8 cm | 19.61" |


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

| | |
|-----------|------|
| Container | ABS |
| Cover | ABS |
| Handles | None |

Cycle Life vs. Depth of Discharge

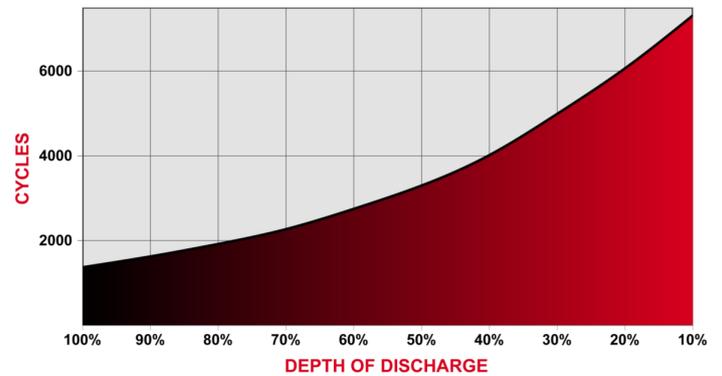

Capacity vs. Temperature

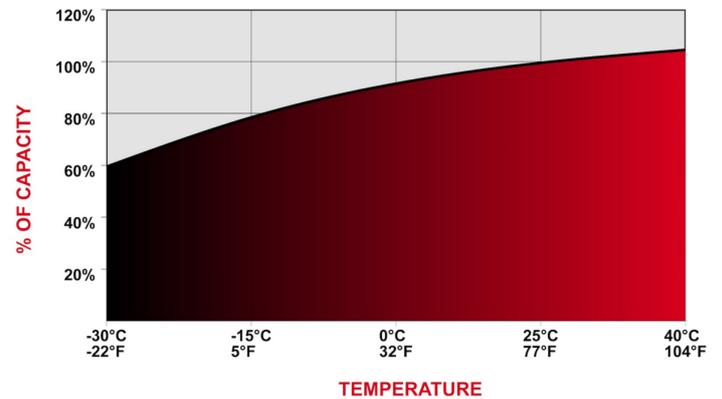

ISO 9001

ISO 14001

OHSAS 18001

MH 28539