



| | | | |
|-------------------|---|----------|--------------------|
| Series | AGM-S | Warranty | See Warranty Terms |
| Volts | 6 | BCI | G27 |
| Cells | 3 | | |
| Terminal Type | F12(M8) and TP08 Adapter [+21mm] | | |
| Included Hardware | M8 stainless bolts & washers & TP08 adapter | | |
| Size & Thread | M8 | | |

Charge

| | |
|----------------------------|---------------------------------------|
| Charge Voltage Range | 2.45 V/cell @ 25°C (77°F) |
| Float Voltage Range | 2.3 V/cell @ 25°C (77°F) |
| Recommended Charge Current | 45 A |
| Maximum Charge Current | 70 A |
| Self-Discharge Rate | Less than 2% per month at 25°C (77°F) |
| Internal Resistance | 1.3 mΩ |

Capacity

| Capacity Affect by Temperature | 40°C (104°F) | 25°C (77°F) | 0°C (32°F) | -15°C (5°F) |
|--------------------------------|-----------------|----------------|---------------|----------------|
| | | 102% | 100% | 85% |

| Hour Rate | Capacity / AMP Hour | Current / AMPs |
|-----------------|---------------------|----------------|
| @ 100 Hour Rate | 260 AH | 2.6 A |
| @ 20 Hour Rate | 234 AH | 11.7 A |
| @ 10 Hour Rate | 220 AH | 22 A |
| @ 5 Hour Rate | 192 AH | 38.4 A |


Specifications

| | | | |
|---------------------------------------|-------------------|---------|----------|
| SAI GLOBAL ISO 9001 Quality | Weight | 32 kg | 70.5 lbs |
| | Length | 30.7 cm | 12.09" |
| | Width | 16.9 cm | 6.65" |
| | Height Inc. Term. | 22.5 cm | 8.86" |


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

| | |
|-----------|-------------|
| Container | ABS |
| Cover | ABS |
| Handles | Nylon Strap |

Cycle Life vs. Depth of Discharge

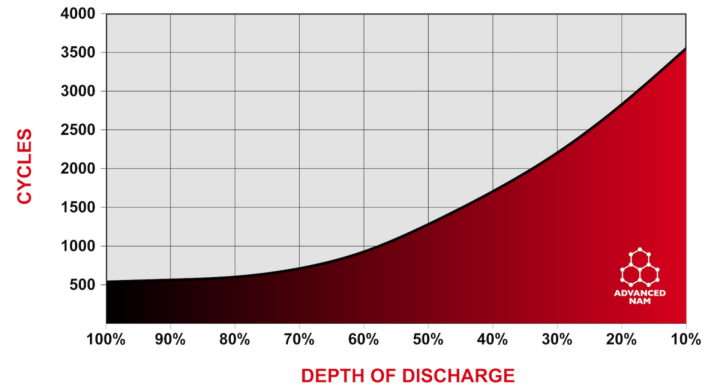

Capacity vs. Temperature

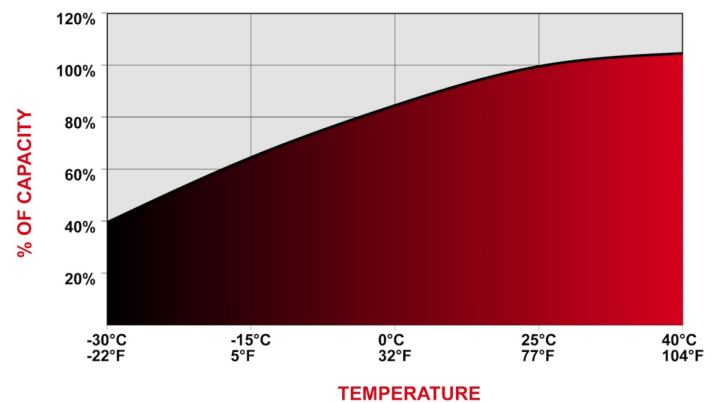

ISO 9001



ISO 14001



OHSAS 18001



MH 28539