



Series	AGM-S	Warranty	See Warranty Terms
Volts	6	Design	GC2H
Cells	3		
Terminal Type	F14(M8) and TP08 Adapter [+21mm]		
Included Hardware	M8 stainless bolts & washers & TP08 adapter		
Size & Thread	M8		

Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	75 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	1.3 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	960			
Marine Crank Amps (MCA) 32°F / 0°C	1100			
Reserve Capacity (RC @ 25A)	531 Minutes			
Reserve Capacity (RC @ 75A)	135 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%


Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	275 AH	2.75 A
@ 20 Hour Rate	250 AH	12.5 A
@ 10 Hour Rate	229 AH	22.9 A
@ 5 Hour Rate	204 AH	40.8 A

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	136.1	78.5	56.6	39.7	27.2	22.5


Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	34.5 kg	76 lbs
	Length	260 mm	10.24"
	Width	180 mm	7.09"
	Height Incl. Term.	268 mm	10.55"
Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.			
Container	ABS		
Cover	ABS		
Handles	Nylon Strap		

Cycle Life vs. Depth of Discharge

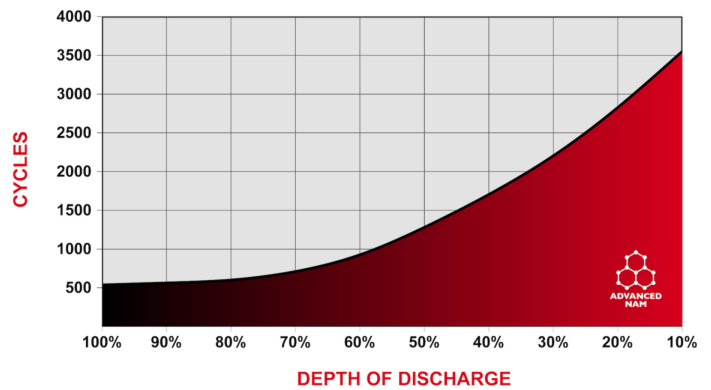

Capacity vs. Temperature

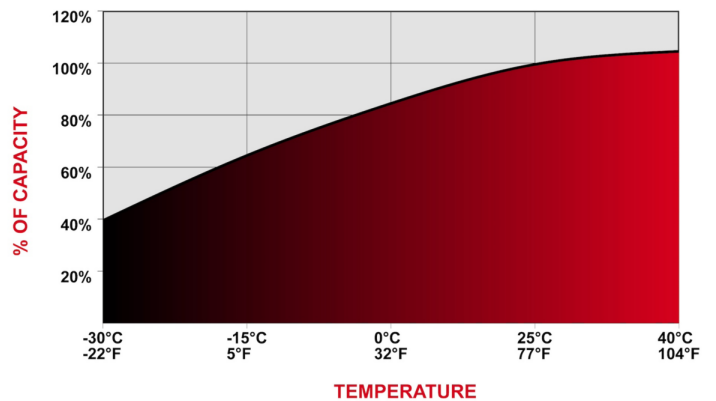

bc BATTERY COUNCIL INTERNATIONAL
 Designed in compliance with applicable BCI, DIN, BS & IEC standards.
 Tested in compliance to BCI & IEC standards.

