



Series	AGM-S	Warranty	See Warranty Terms
Volts	12	Design	J185
Cells	6		
Terminal Type	F23(M8)		
Included Hardware	M8 stainless bolts & washers		
Size & Thread	M8		

### Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	45 A
Maximum Charge Current	65 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	2.3 mΩ

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1000
Marine Crank Amps (MCA) 32°F / 0°C	1200
Reserve Capacity (RC @ 25A)	420 Minutes
Reserve Capacity (RC @ 75A)	110 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>240 AH</b>	<b>2.4 A</b>
@ 20 Hour Rate	<b>215 AH</b>	<b>10.75 A</b>
@ 10 Hour Rate	<b>193 AH</b>	<b>19.3 A</b>
@ 5 Hour Rate	<b>172 AH</b>	<b>34.4 A</b>

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
1.75 VPC	106.7	65.2	51.1	34.9	24.4	20.3


### Specifications

Weight	63.5 kg	140 lbs
Length	381 mm	15"
Width	180 mm	7.09"
Height Incl. Term.	370 mm	14.57"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

### Cycle Life vs. Depth of Discharge

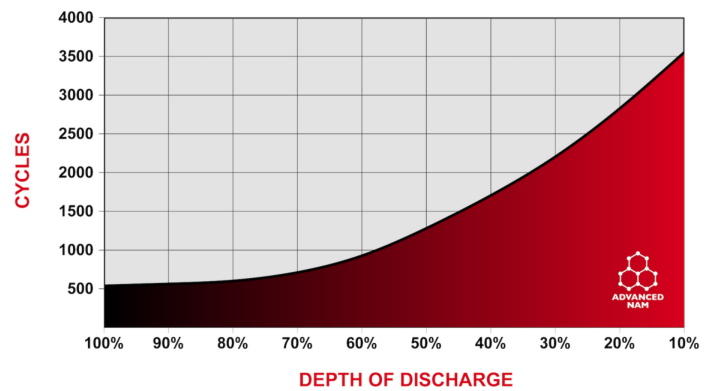

### Capacity vs. Temperature

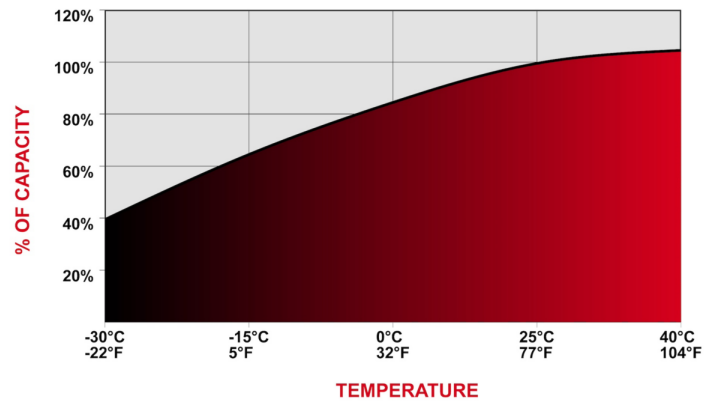

**bc** BATTERY COUNCIL INTERNATIONAL  
 Designed in compliance with applicable BCI, DIN, BS & IEC standards.  
 Tested in compliance to BCI & IEC standards.

